


GTS-100Nseries

ELECTRONIC TOTAL STATION

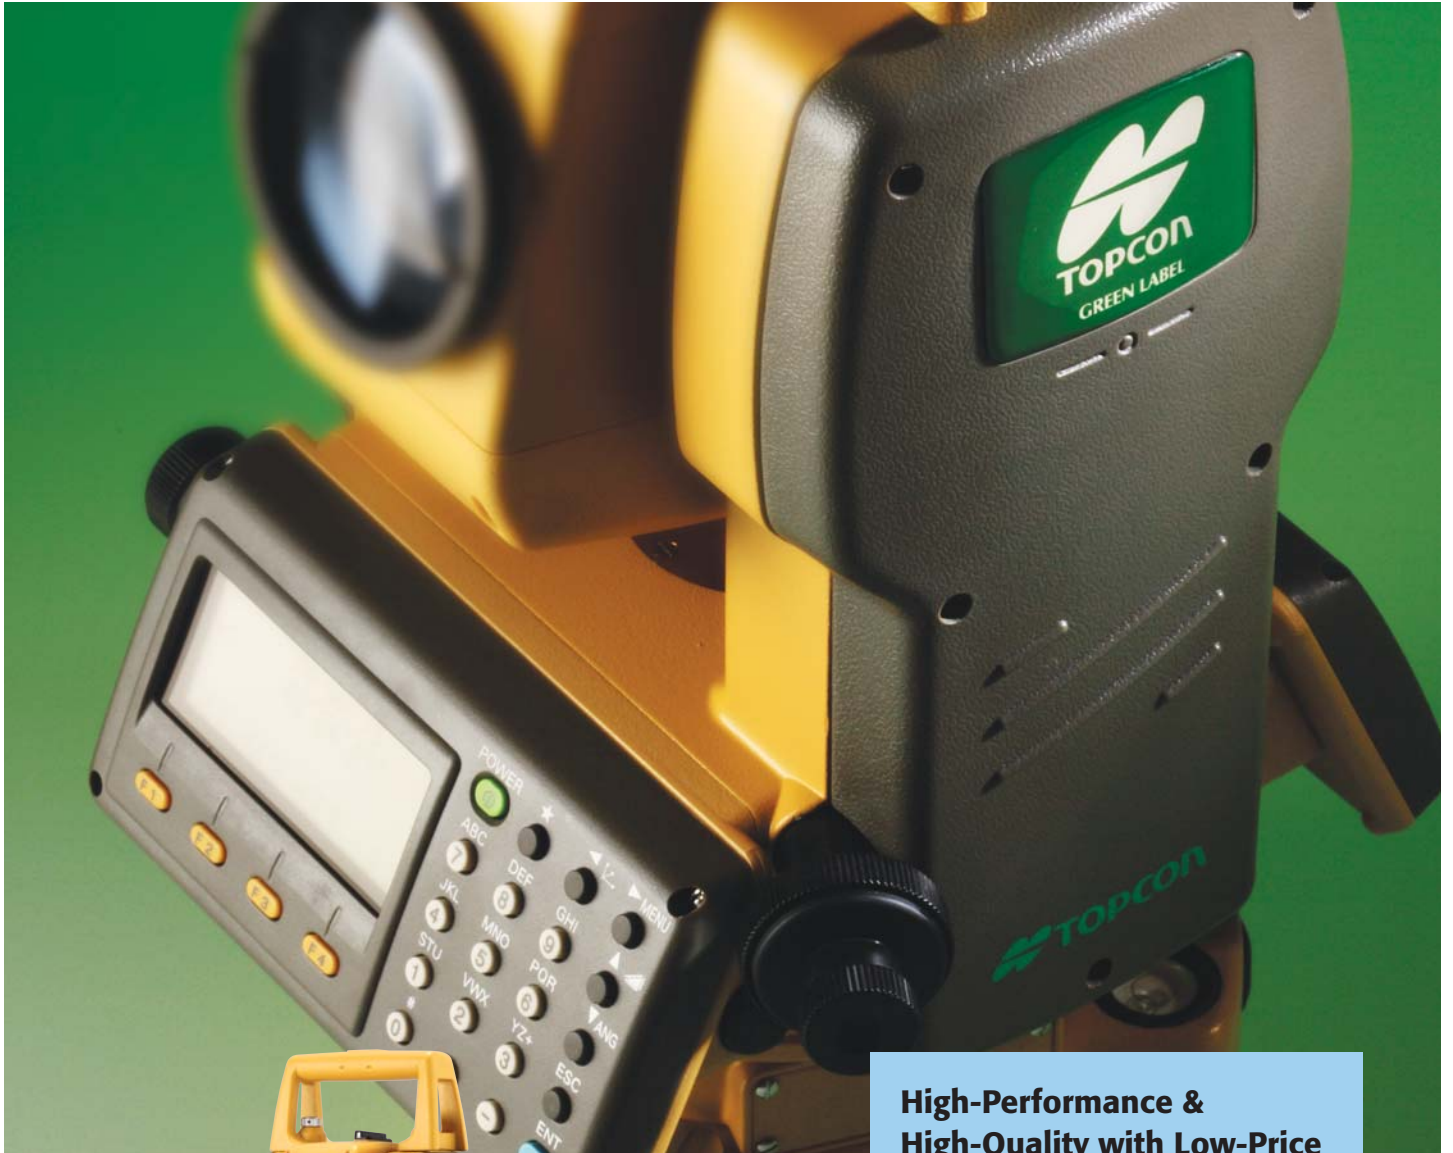

**High-Performance &
High-Quality with Low-Price**

- *Solid Toughness body*
- *Large Display*
- *Absolute Encoder*
- *Versatile Field Application Software*
- *Alphanumeric Key for Quicker Data Input*
- *Long Life Battery*



High Accuracy & Long Measuring Range

Long distance: 2,000m with Single Prism
Higher accuracy: $\pm(2\text{mm}+2\text{ppm})$

Versatile Application Programs

- On-board data collection, Stakeout/Survey, Road Calculation, and many more functions.
- Integrated Alphanumeric key realizes the quicker operation
- Large internal memory up to 24,000 pts

Enhanced Absolute Encoder

Adopted absolute encoder, which doesn't require 0 set. Thanks to this encoder, it can realize stable measurement with less reading error.

Superior Waterproof; Dustproof

Applied to IEC Standard 60529. No worry about sudden bad weather.

STANDARD COMPONENTS



GTS-105N(with lens cap)	1 each
On-board Battery BT-G1	1 each
Battery Charger BC-G1C	1 each
Plastic Carrying Case	1 each
Tool kit with case	1 each
Plastic rain cover	1 each
Silicon cloth	1 each

It's time.

TOPCON CORPORATION

75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, Japan
Phone: (+81)3-3558-2527/2521 Fax: (+81)3-3960-4214
www.topcon.co.jp

Specifications

GTS-105N

TELESCOPE	
Length	150mm
Objective Lens	Dia. 45mm (EDM50mm)
Magnification	30×
Field of View	1°30'
Resolving Power	3.0"
Minimum Focus	1.3m
DISTANCE MEASUREMENT*	
Mini Prism	900m
1 Prism	2000m
3 Prism	2700m
*Slight haze with visibility about 20km moderate sunlight with light heat shimmer.	
Accuracy	$\pm(2\text{mm}+2\text{ppm}\times D)\text{m.s.e}$
ANGLE MEASUREMENT	
Accuracy	5"
Method	Absolute Reading
Reading Method (H)	Dual
Reading Method (V)	Single
Minimum Reading	5"/1"
Tilt Correction	Single Axis
OTHERS	
Display Unit	Graphics LCD 160×64 Dots, 2 Sides
Keyboard	Alpha-Numeric key
Dimension	336(H)×184(w)×172(L)mm
Weight	4.9kg (with battery)
Durability	
Protection against water & dust	IP54 (Based on the standard IEC60529)
Ambient Temperature Range	-20°C to +50°C
Internal Memory	24,000pts
BATTERY BT-G1	
Operation Time	8 hours
BATTERY CHARGER BC-G1C	
Input Voltage	AC230V
Recharging time	1.8 hours BT-G1 (+10°C to +40°C)

Your local Authorized Topcon Dealer is: